



EXHIBIT E

Lighting Plan

LUMINAIRE LIST									
INDEX	MANUFACTURER	ARTICLE NAME	ITEM NUMBER	FITTING	LUMINOUS FLUX	LIGHT LOSS FACTOR	CONNECTED LOAD	QUANTITY	MOUNTING POLE HEIGHT
L1	HUBBELL OUTDOOR	RATIO AREA LENS GASKETS AND BACK LIGHT SHIELDS	RAR-2-320L-110--3K7-4-BC	1X X-70-CRI	7949 LM	0.80	100 W	4	22 FT

NOTE: STANDARD WSDOT APPROVED 150 WATT TYPE III HPS COBRA HEAD
USED FOR EXISTING STREET LIGHTING IN DAUNTLESS DRIVE

LIGHTING ELECTRICAL PLANS TO BE PREPARED BY SITE ELECTRICAL CONTRACTOR/ENGINEER (UNDER SEPARATE PERMIT).

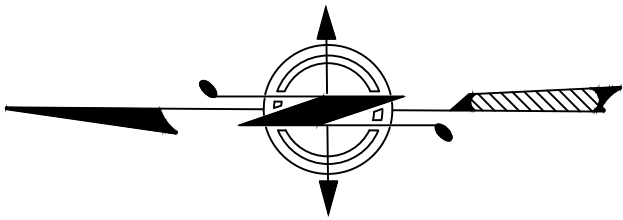

NOTE
THE APPROXIMATE LOCATION OF EXISTING UNDERGROUND UTILITIES ARE SHOWN ON THE PLANS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE THE LOCATION OF EXISTING UTILITIES PRIOR TO COMMENCING WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGES THAT MIGHT BE OCCASIONED BY THE CONTRACTOR'S FAILURE TO LOCATE, PRESERVE AND PROTECT UNDERGROUND UTILITIES.

CALL 48 HOURS BEFORE YOU DIG 811

